


CATALOGUE SẢN PHẨM



HOP QUANG SERVICES TECHNICAL TRADING CO.,LTD

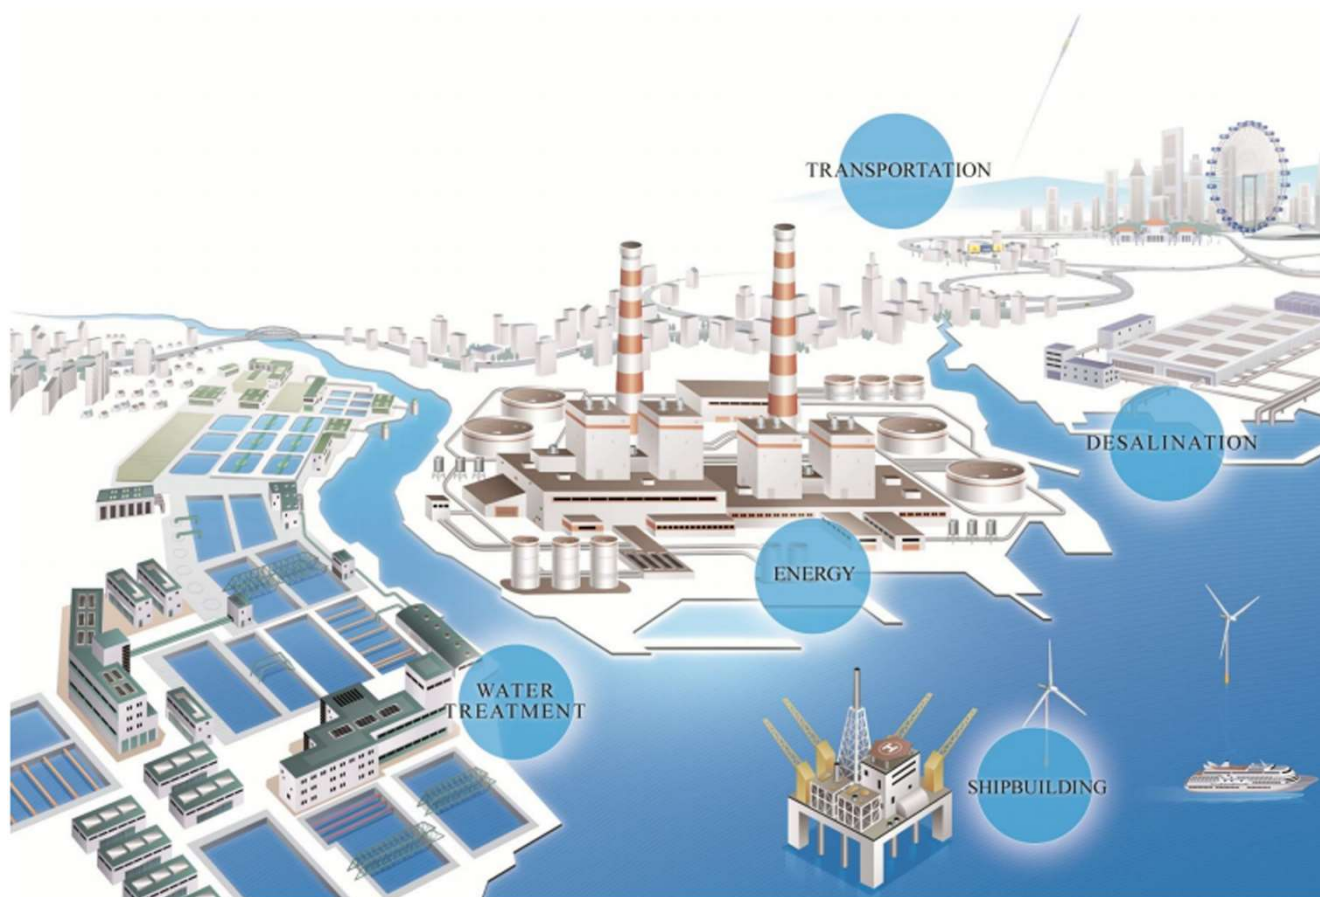

HOPQUANGCARE.COM.VN

Giới thiệu sơ lược Công ty HOPQUANGCARE

Lĩnh vực hoạt động kinh doanh



- Sản xuất & Gia công các mặt hàng cơ khí.**
- Gia công bồn chứa xăng dầu, máy móc thiết bị ngành công nghiệp, cơ giới.**
- Gia công tủ điện máng cáp, và lắp đặt các hệ thống nhiên liệu.**



CÔNG TY TNHH THƯƠNG MẠI DỊCH VỤ KỸ THUẬT HỢP QUANG

HOPQUANG TECHNICAL SERVICES TRADING CO., LTD

Năm thành lập: 02/2008 HCM City, Vietnam

Giấy phép kinh doanh: 4104007180 - Tax number: 030549659

Factory : 95/3 Go Dau St, Tan Quy Ward, Tan Phu District, HCM City

Office : 95/2A Go Dau St, Tan Quy Ward, Tan Phu District, HCM City





Hotline: (028)22457329 - 09030344090

www.hopquangcare.com.vn

**Factory : 95/3 Go Dau St, Tan Quy Ward, Tan Phu District, HCM City
Office : 95/2A Go Dau St, Tan Quy Ward, Tan Phu District, HCM City
Hotline: (028)22457329- 0903034409
www.hopquangcare.com.vn
hopquangcare@yahoo.com.vn
www.hopquangcare.com.vn**

BỒN NGANG - STORAGE TANK

hopquangcare.com.vn

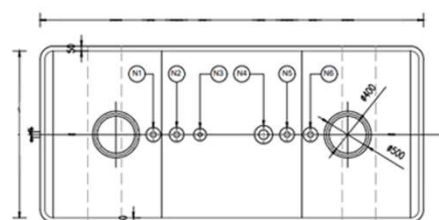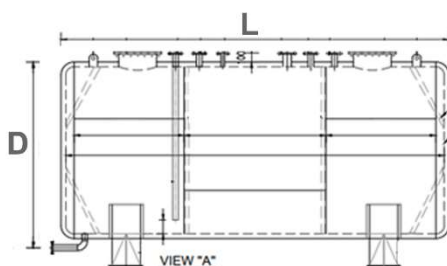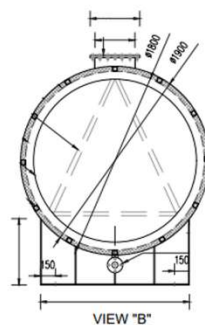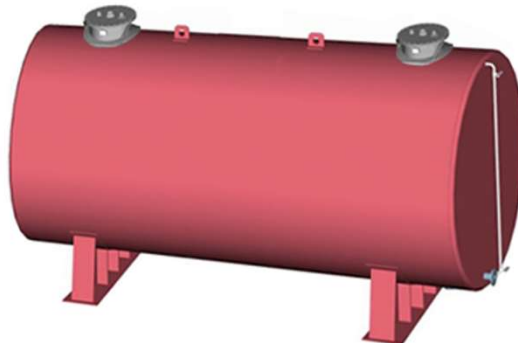

QUY CÁCH BỒN TRÒN - KHÔNG CHÂN

DIAMETER	LENGTH	CAPACITY(L)	THICK (mm)
Đường kính	Dài	THỂ TÍCH (L)	ĐỘ DÀY
(mm)	(mm)	(Lít)	(mm)-SS400
1000	1500	1100	3
1200	1600	1800	3
1300	1700	2200	3
1400	1800	2700	3
1400	2000	3000	3
1500	2500	4400	4
1500	3000	5200	5
1600	3500	7000	5
1600	3800	7600	5
1700	3800	8600	6
1800	3800	9600	6
1900	4000	11000	6
1900	4400	12000	6
2000	4500	14000	8
2000	5000	15000	8
2000	5500	17000	8
2000	6000	18500	8
2200	6000	22500	8
2320	6000	25000	8
2400	6000	27000	10
2400	6500	29000	10
2500	6500	31000	10

Độ dày thép 3MM - 10 mm THÉP SS400
SƠN 2 LỚP - ĐÃ KIỂM ĐỊNH

1. Vật liệu:

- Thép tấm (SS400)
- Thép không gỉ (SUS 304)

2. Tiêu chuẩn sản phẩm:

- Thân bồn: SP1-650.
- Đường hàn: TCVN 6008-1995.

3. Áp suất:

- Thiết kế: 0.3 KG/cm².
- Kiểm tra: 0.4 KG/cm².
- Làm việc: ATM.

4. Độ cao chân tối đa:

- 1.2m (đến 25 m³).
- 1.6m (đến 50 m³).

1. Material:

- Milt steel (SS400).
- Stainless steel (SUS 304).

2. Technical speccification:

- Body tank: SP1-650.
- Welding standard: TCVN 6008-1995.

3. Pressure:

- Design: 0.3 KG/cm².
- Testing: 0.4 KG/cm².
- Working: ATM.

4. Height of leg maximum:


- 1.2m (to 25 cm)
- 1.6m (to 50 cm).

CÔNG TY TNHH THƯƠNG MẠI DỊCH VỤ KỸ THUẬT HỢP QUANG
HOPQUANG TECHNICAL SERVICES TRADING CO.,LTD


Factory : 95/3 Go Dau St, Tan Quy Ward, Tan Phu District, HCM City
Office : 95/2A Go Dau St, Tan Quy Ward, Tan Phu District, HCM City
Hotline: (028)22457329- 0903034409
www.hopquangcare.com.vn

BỒN VUÔNG - DAYLY TANK

hopquangcare.com.vn

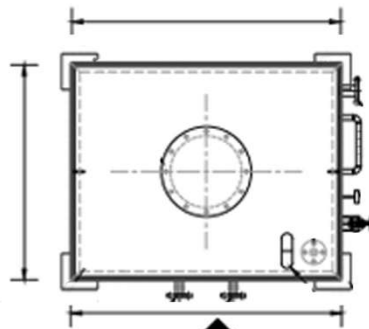

TOP VIEW

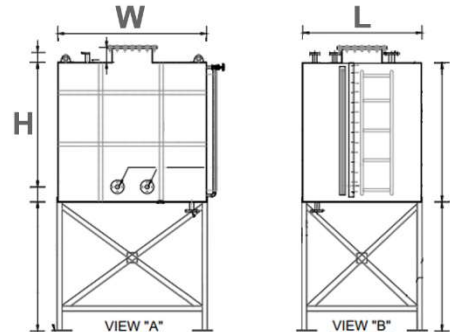

1. Vật liệu:

- Thép tấm (SS400)
- Thép không gỉ (SUS 304)

2. Tiêu chuẩn sản phẩm:

- Thân bồn: SP1-650.
- Đường hàn: TCVN 6008-1995.

3. Áp suất:

- Thiết kế: 0.3 KG/cm².
- Kiểm tra: 0.4 KG/cm².
- Làm việc: ATM.

4. Độ cao chân tối đa:

- 1.2m (đến 25 m³).
- 1.6m (đến 50 m³).

1. Material:

- Mild steel (SS400).
- Stainless steel (SUS 304).

2. Technical specification:

- Body tank: SP1-650.
- Welding standard: TCVN 6008-1995.

3. Pressure:

- Design: 0.3 KG/cm².
- Testing: 0.4 KG/cm².
- Working: ATM.

4. Height of leg maximum:

- 1.2m (to 25 cm)
- 1.6m (to 50 cm).

ĐẠT TÍNH KỸ THUẬT / SPECIFICATION

Sơn Paint	Lót: 1 lớp chống rỉ
	Primer: 1 layer anti-rust
	Hoàn thiện: Sơn xanh da trời Finish: Blue
Vật tư Material:	Thép SS400 Steel SS400
Tiêu chuẩn hàn Welding:	AW6013 J42
Phương pháp thử:	TCVN : 10262:2014
Test:	VietNam Standard 1062-2014
Áp suất thử:	TCVN : 10262:2014
PressureTest:	VietNam Standard 1062-2014
Môi chất: Liquid:	Dầu diesel Diesel oil
Loại bồn chứa:	Hình chữ nhật
Tank type:	Rectangle

KÍCH THƯỚC BỒN DẦU

DIMENTION (L x W x H)mm			CAPACITY(L)	THICK (mm)
DÀI (mm)	RỘNG (mm)	CAO (mm)	THỂ TÍCH (L)	ĐỘ DÀY (mm)
1000	1000	1230	1230	2.5
1200	1000	1230	1476	3
1230	1230	1230	1860	3
1400	1230	1230	2100	3
1500	1230	1230	2200	3
1500	1400	1230	2500	3
1600	1400	1230	2700	3
1600	1230	1500	2900	4
1600	1400	1500	3300	4

CHÂN CAO 300MM - THÉP 4MM SS400

SƠN 2 LỚP - ĐÃ KIỂM ĐỊNH


Chân bồn có thể thay đổi theo yêu cầu

CÔNG TY TNHH THƯƠNG MẠI DỊCH VỤ KỸ THUẬT HỢP QUANG
HOPQUANG TECHNICAL SERVICES TRADING CO.,LTD

Factory : 95/3 Go Dau St, Tan Quy Ward, Tan Phu District, HCM City
Office : 95/2A Go Dau St, Tan Quy Ward, Tan Phu District, HCM City
Hotline: (028)22457329- 0903034409
www.hopquangcare.com.vn

BẢNG ĐIỀU KIỆN - KIT TANK OIL

hopquangcare.com.vn

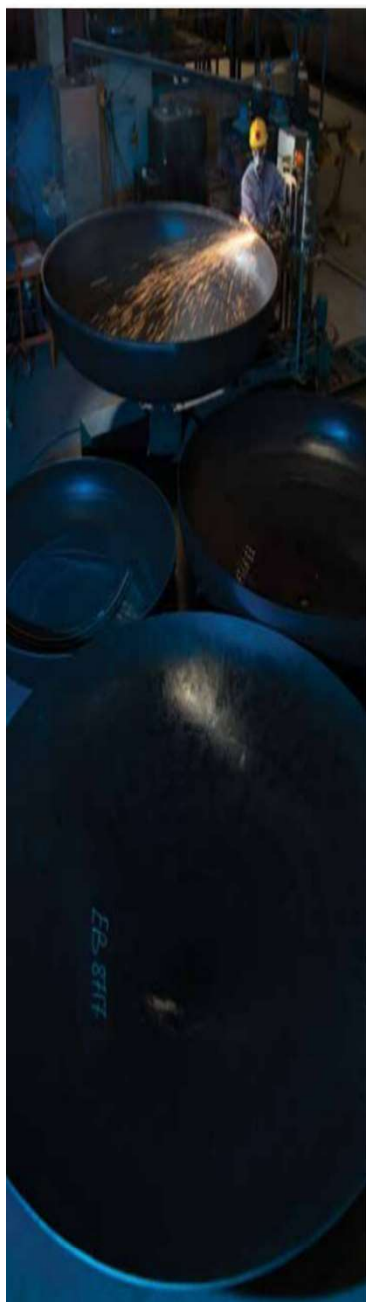

Technical information

Supply voltage 230 V / 50 Hz
(110 V / 60 Hz)
Protection IP 55
Full scale 4 m (12 feet)
Accuracy $\pm 1\%$ full scale
Contact for maximum and minimum level

30Vdc at 5 Amp)
Probe tube length 10 m (10,6 yards) (extensible up to 50 m (52 yards)).
Level indication
- Height (mm, inch)
- Volume (liters, gallons)
- Filling percentage (%)
- RS output for PC connection available

Main Advantages

- Continuous metering
- Indication in height, volume, and filling percentage
- Maximum and minimum level alarms
- High accuracy
- Intuitive software managing procedure
- Easy installation
- PC linkup option



Remote panel



Level



Volume




%



Viscosity up to 30 cSt

Accuracy $\pm 1\%$

PC Available

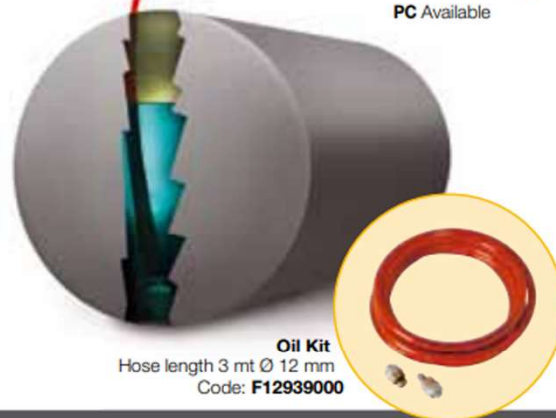

Oil Kit

Hose length 3 mt Ø 12 mm
Code: F12939000

Code	Description	Viscosity Cst	AC Volt/Hz	RS exit	Weight kg	Packaging mm
F00775510D	Level indication LV/RS output	Up to 30	230/50	Available	2.2	300x410x100

CÔNG TY TNHH THƯƠNG MẠI DỊCH VỤ KỸ THUẬT HỢP QUANG
HOPQUANG TECHNICAL SERVICES TRADING CO.,LTD

Factory : 95/3 Go Dau St, Tan Quy Ward, Tan Phu District, HCM City
Office : 95/2A Go Dau St, Tan Quy Ward, Tan Phu District, HCM City
Hotline: (028)22457329- 0903034409
www.hopquangcare.com.vn
hopquangcare@yahoo.com.vn
www.hopquangcare.com.vn



CÔNG TY TNHH THƯƠNG MẠI DỊCH VỤ KỸ THUẬT HỢP QUANG
HOPQUANG TECHNICAL SERVICES TRADING CO.,LTD



hopquangcare.com.vn



BOM - PUMPS

hopquangcare.com.vn

ATEX and API 676

Wide range of materials: ductile iron, WCB steel, AISI 316 stainless steel
- Versions: ATEX and API 676
- Viscosity: from 20 to 100,000 [mm²/s – cSt]
- Temperature of the liquid: 200°C max (HT version: 300°C)



MODEL ST- R

The pump is automatically primed to a height of 7.5 m
- Semi-open impeller allowing the passage of large diameter solids, easy to inspect
- Wide range of materials: cast iron, AISI 316 L (CF3M) stainless steel
- Compliance with ATEX standards



MODEL J

- High resistance to abrasive liquids: turbid, muddy, sandy waters with solids in suspension
- Easy to install: only the suction pipe needs to be immersed in the liquid. The pump can be located above and in a dry place
- Wide range of materials: cast iron, AISI 316 L (CF3M) stainless steel
- Compliance with ATEX standards



MODEL LB

They are used in industrial and construction sectors.
- Rapid dry self-priming down to 6 m in a few seconds
- Can run dry indefinitely
- High abrasion resistance
- Passage of large diameter solids



MODEL G

External gear volumetric pumps. Used in industrial facilities to pump liquids of medium viscosity not containing any suspended solids:
- Chemical products
- Oil products
- Soaps and cleaning products
- Adhesives
- **Paints and inks**



MODEL SAXMAG V

Pumps with magnetic drive. Due to its static grip the SAXMAG V system guarantees contactless force transmission and no leaks. The SAXMAG magnetic drive is used in industrial facilities for the pumping of inflammable, explosive and polymerizing liquids.
- High transmissible torque
- Operating temperature limit of 200°C
- Compliance with the ATEX regulations.



MODEL VULCAN

Single-screw pumps. Progressive cavity screw pumps for liquids with any kind of viscosity that contain abrasives and a high percentage of solids
- Constant capacity, directly proportional to the rotational speed and quite independent of pressure
- Viscosity up to 1,000,000 [cPs]
- Liquid temperature: 180°C max
- ATEX version



Electric Pump

- Submersible Pump, Clarified Water Pump, Sewage
- Pump 100% copperwire
- Chrome-plated pump rotor (more resistant to wear and corrode)
- Thermal protector/ Voltage: 220/380V/Weight: 14kg
- High-end bearing and mechanical seal
- Flange or Elbow for the water outlet
- Available for 60HZ /
- Max.Head: 10-30m
- Driving Type: Motor
- Material:Cast Iron
- Structure: Single-stage Pump
- Assembly: Liquid Pumps






Ss304 Centrifugal pump

Application:oil - Horsepower:0.5-110kw
Motor:Explosion Proof, non explosion proof
Capacity: 6.3m³/h-400m³/h; 29-1761GPM
Head: 5 - 125m - Flow Rate:400m³/h
Pressure: High Pressure, 1.6Mpa
Temperature: -20°C-105°C; 68°F-221°F
Structure:Single-stage Pump
Theory:stainless steel Pump
Material:Duplex Stainless Steel
Voltage:220v/380v/6kv/10kv



Chemical centrifugal pump

- Application: Oil Chemical Pump
- Power: 2.2-30KW
- Power Source: Electric
- Pressure: 1.6 Mpa
- Structure: Single-stage Pump
- Voltage: 318V/50HZ, 415V/50HZ
- Flow rate: 1.5 - 110m³/hr
- Head: 16 - 72m

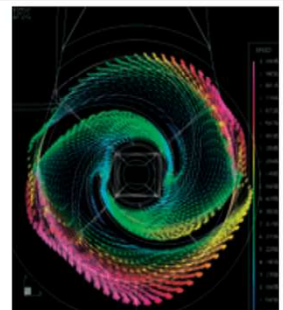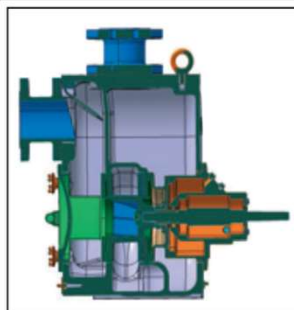


CÔNG TY TNHH THƯƠNG MẠI DỊCH VỤ KỸ THUẬT HỢP QUANG
HOPQUANG TECHNICAL SERVICES TRADING CO.,LTD

Factory : 95/3 Go Dau St, Tan Quy Ward, Tan Phu District, HCM City
Office : 95/2A Go Dau St, Tan Quy Ward, Tan Phu District, HCM City
Hotline: (028)22457329- 0903034409
www.hopquangcare.com.vn
hopquangcare@yahoo.com.vn
www.hopquangcare.com.vn


PHỤ KIỆN - LEVEL SWITCH

hopquangcare.com.vn


Automatic Magnetic Water Reed Flow Switch Sensor

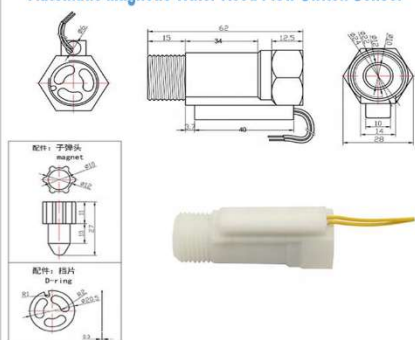


Sus 304 magnetic air flow sensor / Flow switch

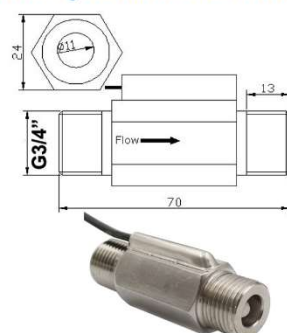


Electronic flow switch

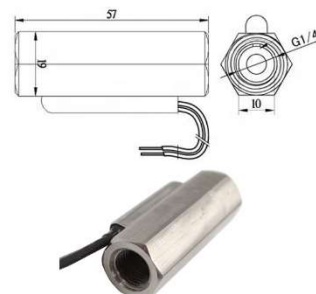


Fuel flow sensor

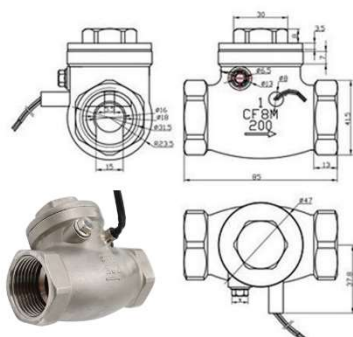


Electronic metal paddle flow switch

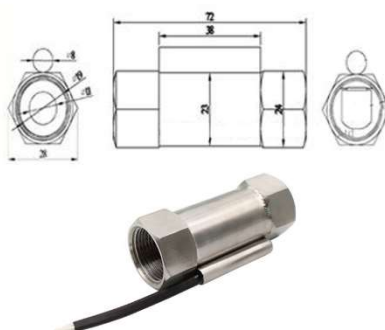


Delicate SUS Circulation Air Flow Switch

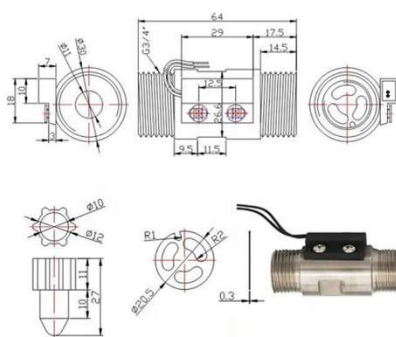


Oil Magnetic Float Liquid Level Gauge Remote Control

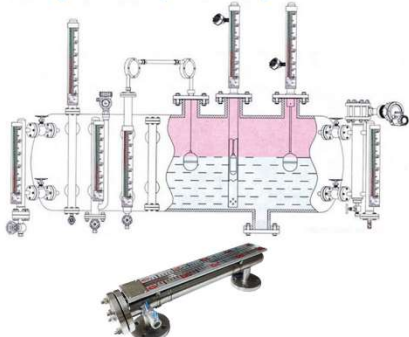

Magnetic Liquid Water Flow Switch

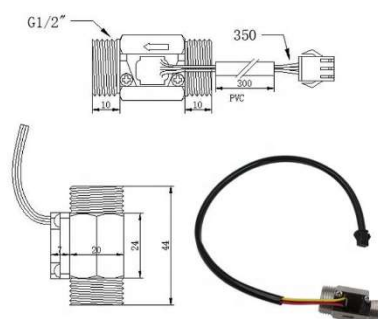


Magnetic float switch

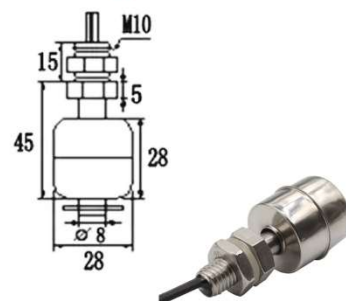

Level Sensor Right Angle SUS304 Float Switch



Float type level switch

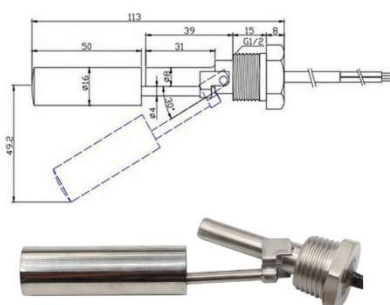

Fuel tank level alarm



CÔNG TY TNHH THƯƠNG MẠI DỊCH VỤ KỸ THUẬT HỢP QUANG
HOPQUANG TECHNICAL SERVICES TRADING CO.,LTD

Factory : 95/3 Go Dau St, Tan Quy Ward, Tan Phu District, HCM City
Office : 95/2A Go Dau St, Tan Quy Ward, Tan Phu District, HCM City
Hotline: (028)22457329- 0903034409
www.hopquangcare.com.vn
hopquangcare@yahoo.com.vn
www.hopquangcare.com.vn

PHỤ KIỆN - FLOW METERS

hopquangcare.com.vn

Diesel fuel Flow Meter



Diesel fuel Flow Meter with mechanical register



Electronic register Counter



Electric Fuel Bio Diesel Transfer Pump



Vapour recovery automatic nozzle



Submersible turbine pump



Variable Area Oil Flowmeters



Magnetic Liquid Water Flow Switch



Electromagnetic solenoid control valve



Electric oil drum pump



Optical Pulser for fuel oil



Engine oil digital oil meter gun



CÔNG TY TNHH THƯƠNG MẠI DỊCH VỤ KỸ THUẬT HỢP QUANG
HOPQUANG TECHNICAL SERVICES TRADING CO.,LTD

Factory : 95/3 Go Dau St, Tan Quy Ward, Tan Phu District, HCM City
Office : 95/2A Go Dau St, Tan Quy Ward, Tan Phu District, HCM City
Hotline: (028)22457329- 0903034409
www.hopquangcare.com.vn
hopquangcare@yahoo.com.vn
www.hopquangcare.com.vn